

KBB4E280/63 BACKWARD CURVED IMPELLER BLOWER



KBB4E280/63




STANDARD FEATURES

- Low noise level
- 650 CFM capacity
- Available in 115 and 230 VAC
- Compact size
- Precision balanced
- External rotor design
- Precision ball-bearing motors
- UL and CE approved

TECHNICAL DATA*

Model	CFM@ 0" S.P.	Cutoff S.P.	Amps	Watts
KBB4E280/63	650	1.15	1.32	148

*60 Hz. operation.

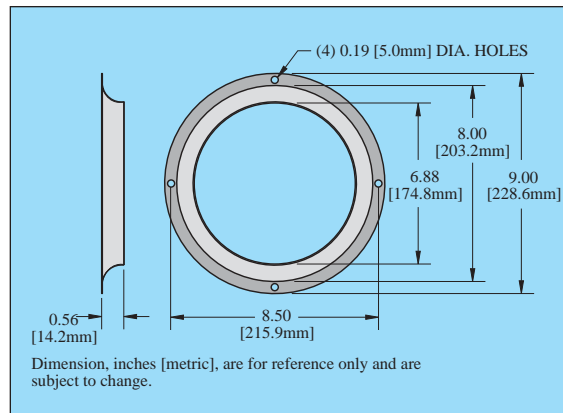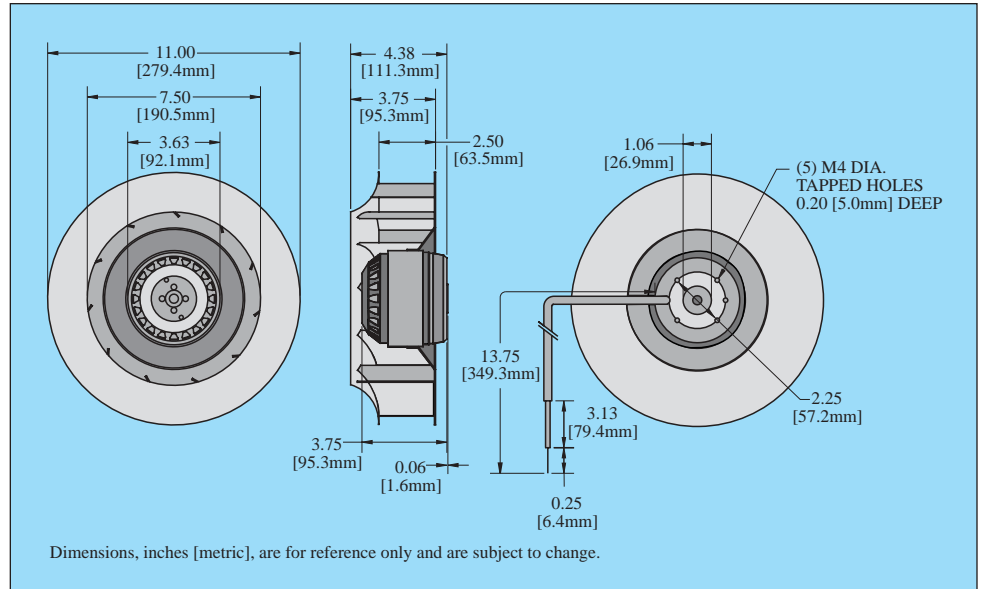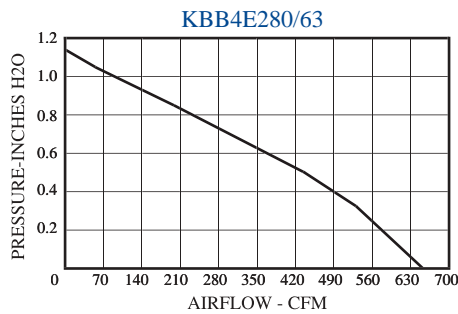

HOW TO ORDER

Specify model number.

For assistance in model selection, refer to the *Blower and Fan Selection Guides*, or contact **KOOLTRONIC**.

CALL 1-800-321-KOOL (5665)
or FAX 609-466-1114

**POPULAR MODELS ARE
STOCKED AND READY
TO SHIP**

Airflow vs. static pressure curves are shown for 60 Hz input.

CONVERSION FACTORS

Multiply airflow in cubic feet per minute (CFM) by:

- 1.7 to obtain airflow in cubic meters per hour (m³/hr.)
- 0.47 to obtain airflow in liters per second (L/S)

Multiply static pressure in inches of water ("H₂O) by:

- 25.4 to obtain static pressure in millimeters of water (mm H₂O)
- 249 to obtain static pressure in Pascals (Pa)

TYPICAL INSTALLATION

