


TECHNICAL DATA

Model	CFM@ Cutoff		Volts	Hz	Amps	Watts	Capacitor		RPM	dBA	Min. Temp.	Max. Temp.
	0" S.P.	S.P.					μF	μF				
K2BC4E192/40A	215	0.56	230	60	0.14	31	1.5	1670	56	-40°F/-40°C	158°F/70°C	
K2BC4E192/40A	185	0.40	230	50	0.15	32	1.5	1405	52	-40°F/-40°C	158°F/70°C	

STANDARD FEATURES



- Low noise level
- 215 CFM capacity
- Available in 230 VAC, 50/60Hz
- Compact size
- Precision balanced
- External rotor design
- Precision ball-bearing motors
- Class F, thermally protected
- UL 94 V-0 plastic impeller
- UL Recognized
- Normally In-Stock

PERFORMANCE

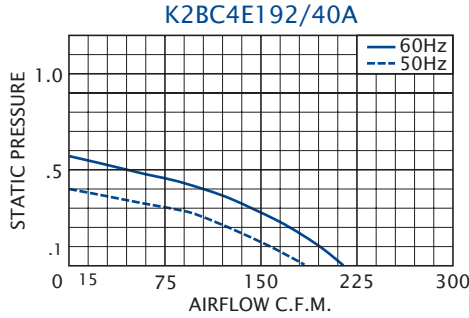


DRAWINGS


Dimensions, inches [mm], are for reference only and are subject to change.

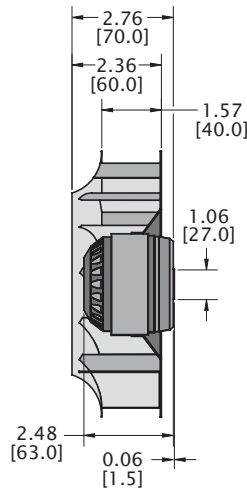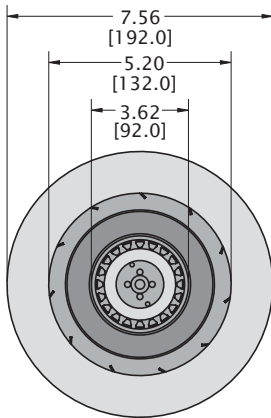

An inlet ring, which must be installed by the customer, is recommended for optimum performance. This unit requires a capacitor which must be mounted and connected by the customer.

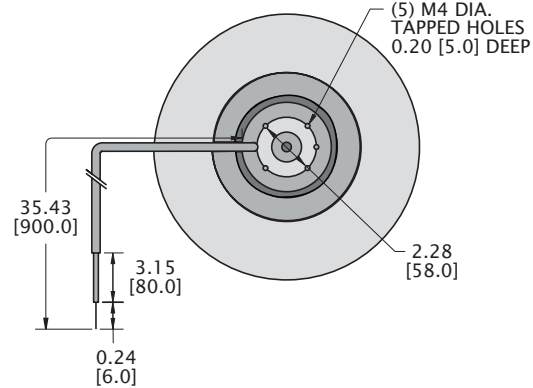

OPTIONAL INLET RING P/N: 1114-08

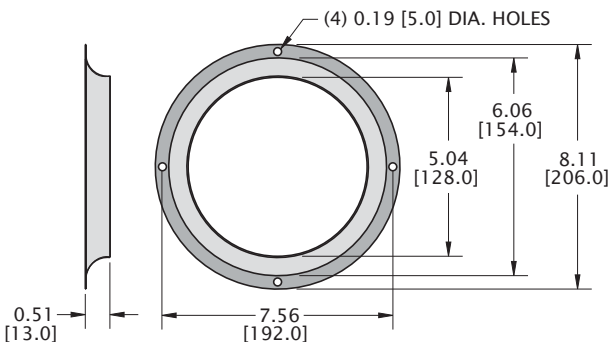

TYPICAL INSTALLATION

