

TECHNICAL DATA

Model	CFM@ 0" S.P.	Cutoff S.P.	DC Volts	Amps	Watts	RPM	dBA	Min. Temp.	Max. Temp.
K7BCE180/35A	270	1.78	24	2.13	51	2995	65	-4°F/-20°C	158°F/70°C




STANDARD FEATURES

- Low noise level
- 270 CFM capacity
- Compact size
- Nominal voltage 24VDC (18-36VDC)
- Precision balanced
- External rotor design
- Precision ball-bearing motors
- Reverse polarity protection
- Soft start
- Locked rotor protection
- Tachometer output (open collector)
- Controlled by 0-10VDC or PWM signal

ACCESSORIES*

Inlet Ring - P/N: 1114-08

PERFORMANCE


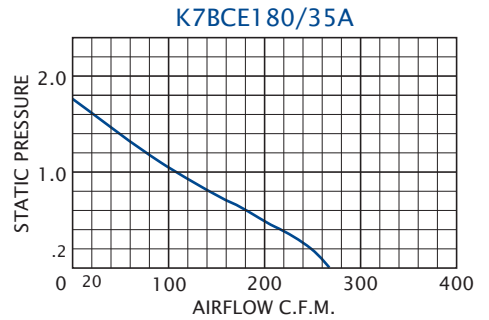


Airflow vs. static pressure curves are shown for 60 Hz input. Static pressure is in inches of water.


***Note:** An Inlet Ring is recommended for optimum performance. These are sold separately, to be installed by the customer.

DRAWINGS


Dimensions, inches [mm], are for reference only and are subject to change.

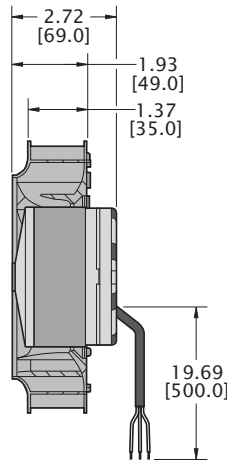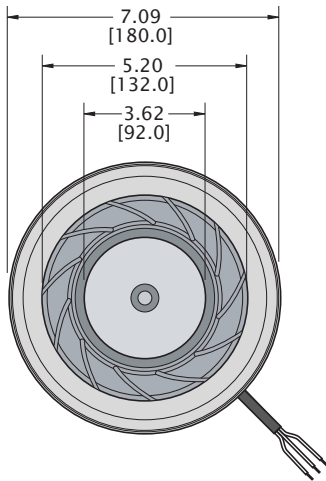


An inlet ring, which must be installed by the customer, is recommended for optimum performance.

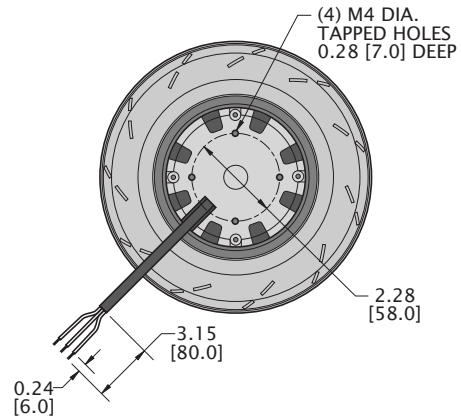

INLET RING P/N: 1114-08

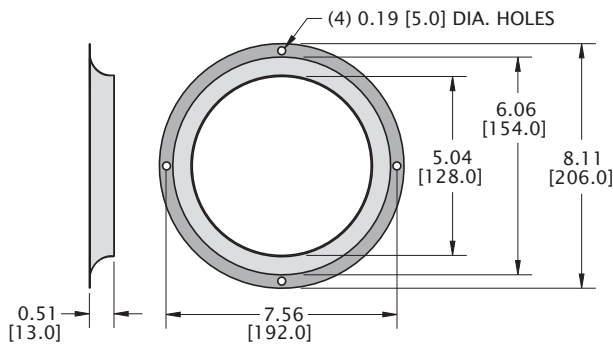

TYPICAL INSTALLATION

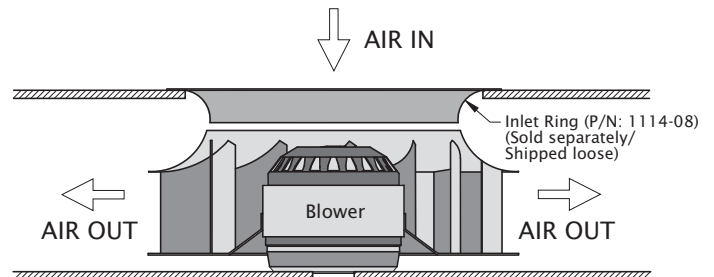

k7bce180-35a.qxd 10/28/05