



# ENCLOSURE RECEPTACLE

## STANDARD FEATURES

Quick connections  
Available with or without fuse  
DIN rail mountable

Model No.	Voltage	Fuse
KSDR/RF	120 VAC	6.3A / 250 VAC max.
KSDR/R	120 VAC	None

## TECHNICAL DATA

Maximum ratings:           With fuse: 6.3 A at AC 250 V  
                                       Without fuse: 15 A at AC 125 V

Fuse size:                    Ø 5 x 20 mm, rated 6.3 A

Service life:                 5000 hours

Connection:                 3 x AWG 20-16 (0.5-1.5 mm<sup>2</sup>)  
                                       push type terminals for stranded or rigid wire

Mounting:                    Clip for 35 mm DIN rail

Dimensions:                 3.6 x 2.4 x 1.9" (92 x 62 x 48 mm)

Housing:                     Plastic, UL94V-0


Protection class:           IP 20

Protection type:            I (grounded)

Operating/storage temperature: -49 to 158°F (-45 to 70°C)



## DRAWINGS

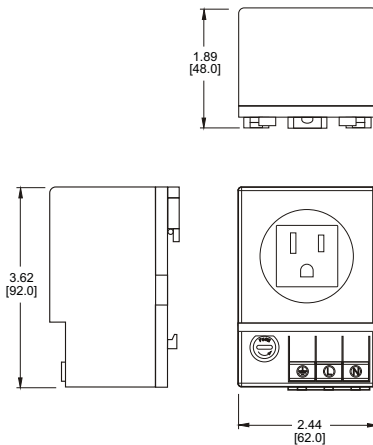

Find additional information on this model at [kooltronic.com](http://kooltronic.com), or use the Technical Documents QR code below.

Technical Documents



Dimensions, inches [mm], are for reference only and are subject to change.

Specifications are subject to change without notice. Suitability of this product for its intended use and any associated risks must be determined by the end customer/buyer in its final application.