ENCLOSURE AIR CONDITIONERS

INTRODUCING THE ACCESS SERIES

Ultra-Slim Depth

NEMA
Type 12, 3R

The new **Access Series** closed-loop enclosure air conditioners from Kooltronic feature an ultra-slim depth, versatile mounting options, and a compact footprint – ideal for limited-space electrical cabinets and door-mount applications.

Access Series AC units are designed to meet cooling capacities of 1,000 - 5,000 BTU/H and can be configured for applicable enclosure IP designations and voltage needs.

Contact an Enclosure Cooling Specialist to learn more.

Kooltronic, Inc. ■ 30 Pennington-Hopewell Rd., Pennington, NJ 08534 ■ (609) 466-3400 ■ sales@kooltronic.com ■ kooltronic.com

PRODUCT DESIGN SPECIFICATIONS:

	KA4C1DSP17L	KA4C2DSP23L	Coming Soon KA4C3DSP28L	Coming Soon KA4C5DSP36L
Max. Height	17 in.	23.58 in.	28 in.	36 in.
Max. Width	17 in.	22.25 in.	24 in.	24 in.
Max. Depth	5.25 in.	5 in.	7 in.	7 in.
Cooling Capacity @ 95/95 °F	1,000 BTU/H	2,300 BTU/H	3,000 BTU/H	5,000 BTU/H
Target Maximum Ambient	122° F	122° F	122° F	122° F
Voltage/Phase/ Frequency*	115/1/60	115/1/60	115/1/60	115/1/60
Refrigerant	R134A	R134A	R134A	R134A
Max. Noise Level	70 dBA	70 dBA	70 dBA	70 dBA
NEMA Rating	12, 3R	12, 3R	12, 3R	12, 3R
Electrical Heater (optional)	325 Watts	500 Watts	500 Watts	725 Watts

Alternative Voltage/Phase/Frequency options include: 208, 230/1/60 and 200/1/50.

PRIMARY FEATURES:

- Rated for compatibility with NEMA 12 and 3R electrical enclosures.
- Designed to prevent condensation from forming inside the kiosk.
- All models UL/CUL Listed and Recognized, a standard of safety.
- CFC-free refrigerant provides a zero ozone depletion potential.
- High-temperature alarm to alert if early action required.
- Compressor short cycle protector.
- Internal corrosion protection.
- Custom solutions available.

MOUNTING OPTIONS:

Front-Rail Mounting

Back-Rail Mounting
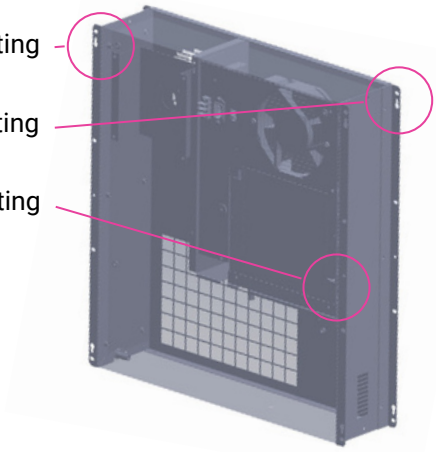
Rivet Nut Mounting