



KBC2E250/56B MOTORIZED IMPELLER

TECHNICAL DATA

Model	CFM@ Cutoff		Volts	Hz	Amps	Watts	Capacitor		RPM	dBA	Min. Temp.	Max. Temp.
	0" S.P.	S.P.					μF	RPM				
KBC2E250/56B	1008	3.3	115	60	2.14	245	25.0	3095	77	-40°F/-40°C	140°F/60°C	
KBC2E250/56B	876	2.4	115	50	1.59	182	25.0	2720	74	-40°F/-40°C	140°F/60°C	



STANDARD FEATURES

- 1008 CFM Capacity
- Available in 115 VAC, 50/60Hz
- Class F, thermally protected
- Compact size
- External rotor design
- Glvanized Steel impeller
- Low noise level
- Normally In-Stock
- Precision balanced
- Precision ball-bearing motors
- UL Recognized




ACCESSORIES*

- Capacitor - P/N: 0452-32
- Inlet Ring - P/N: 1114-09
- Automatic Speed Control



***Note:** This unit requires a capacitor for operation. Capacitors are sold separately and shipped loose for field installation by customer. An Inlet Ring is recommended for optimum performance. These are sold separately, to be installed by the customer.



PERFORMANCE

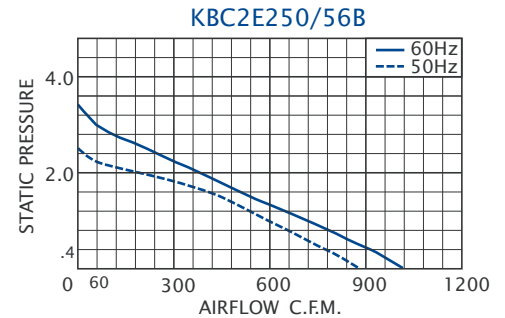


Airflow vs. static pressure curves are shown for 60 Hz and 50 Hz (broken line) inputs. Static pressure is in inches of water.

DRAWINGS


Dimensions, inches [mm], are for reference only and are subject to change.

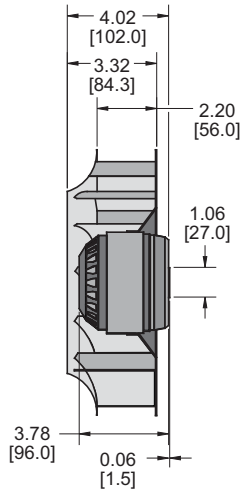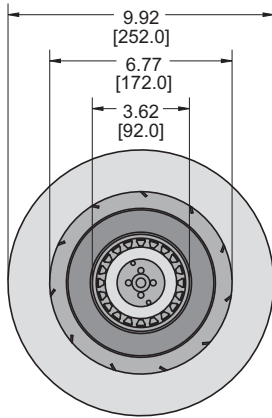


An inlet ring, which must be installed by the customer, is recommended for optimum performance. This unit requires a capacitor which must be mounted and connected by the customer.

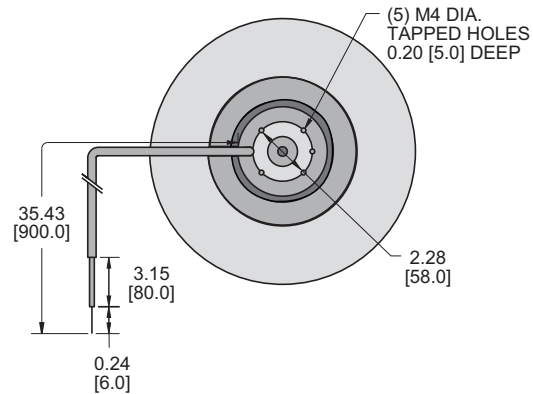

INLET RING P/N: 1114-09

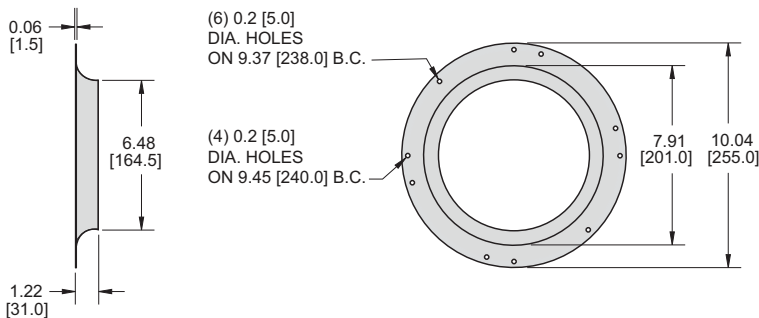

TYPICAL INSTALLATION

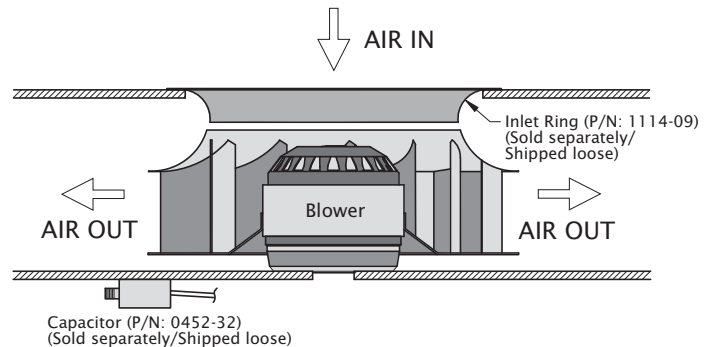

kbc2e250-56b.qxd (12/18/20) (CDR: 20293)