

ADVANTAGE SENTRY SERIES NEMA 3R FILTER FANS KNP40F

TECHNICAL DATA



Model	Normally In Stock	Voltage	Frequency Hz	Input mA	Input Watts	Fan Airflow CFM*	Fan w/Grille Airflow CFM**	Noise db(A)	Operating Temp. °F		Approx. Weight	
									Min.	Max	Lbs.	Kg.
KNP40F	Yes	115 VAC	50/60	.22/.22	18/17	88/102	60/69	45/47.5	14	158	5.0	2.2
K2NP40F	Yes	230 VAC	50/60	.10/.11	15/17	88/102	50/51	45/47.5	14	158	5.0	2.2
K6NP40F		12 VDC	-	0.4	4.8	125	52	45/47.5	14	140	5.0	2.2
K7NP40F		24 VDC	-	0.3	7.2	100	51	45/47.5	14	140	5.0	2.2
K8NP40F		48 VDC	-	<.1	-	100	57	45/47.5	14	158	5.0	2.2

*Fan airflow without filter and grille.

**NEMA Rated if installed with provided filter.

STANDARD FEATURES

- Baked Powder Finish
- Integrated Fan Guards
- Integrated Sealing Gasket
- NEMA 3R Rating Maintained (if used with provided filter)
- Secure Mounting
- Six foot [1.8m] (minimum) 3-wire power cord
- UL/CSA Shielded Ball Bearing Motors
- UL/CUL Listed
- Washable, Reuseable Filter

ACCESSORIES AND OPTIONS


- Grille Assembly (P/N: KNPA40F)
- IP54 & IP55 Filter Protection available
- Other voltages, both AC and DC
- Replacement Filters (P/N: 531F)
- Reversed Airflow Direction



NEMA
TYPE 3R
MAINTAINED



PERFORMANCE CHART

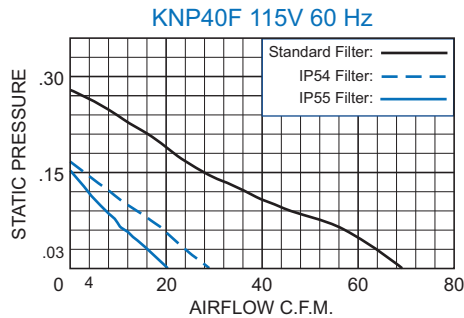


Airflow vs. static pressure curve is shown for 60 Hz inputs.
Static pressure is in inches of water.

Find additional information on this model at kooltronic.com, or use the Technical Documents QR code below.



Technical Documents



DRAWINGS

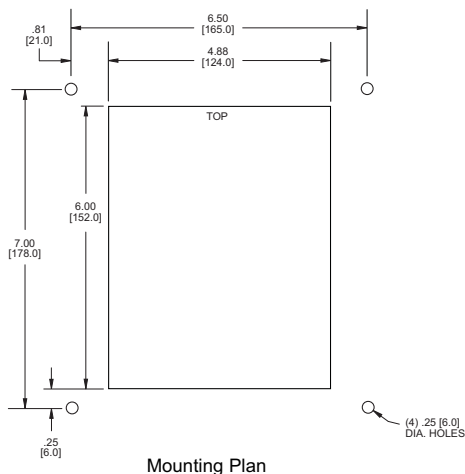


Mounting Plan

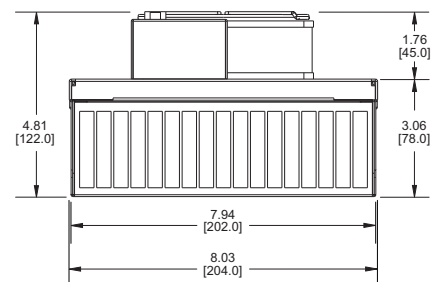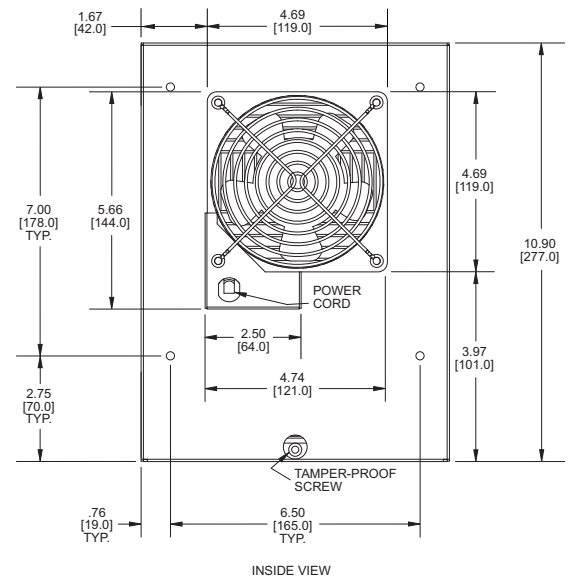

Dimensions, inches [mm], are for reference only and are subject to change.

knp40f.qxd (6/28/21) (CDR: 20336)

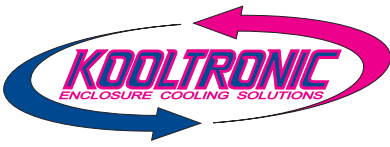

ADVANTAGE SENTRY SERIES NEMA 3R FILTER FANS KNP40F

DESCRIPTION

Kooltronic has expanded its line of filter fans to include models offering the versatility and security of indoor or outdoor use. These new additions to the **Advantage Sentry Series Filter Fans** have a NEMA 3R Rating and are a perfect choice for dissipating high heat loads economically. These filter fans are also available in a variety of sizes, voltages and protection levels.

The new **Advantage Sentry Series Indoor/Outdoor Filter Fans** offer the same convenience, versatility and reliability as the **Advantage Series Filter Fans** with the added protection of a NEMA 3R rating, making these models an excellent choice for telecommunications and other outdoor applications.

COMPONENT CHARACTERISTICS

- Standard airflow direction is from the outside to the inside of the cabinet.
- The standard filters consist of a multi-layer grid of corrugated aluminum, securely held in a one-piece aluminum frame. A non-drying adhesive coating traps a high percentage of particulate matter. These filters are reusable, they may be washed and recoated with the appropriate filter recoating adhesive. Replacements are available for those which become damaged or otherwise non-serviceable.
- Standard filters have an average arrestance of 64% with a dust-holding capacity of 474g/m². (Filters are necessary in order to maintain NEMA 3R Rating.)

ACCESSORIES AND OPTIONS

- Filter fans can be supplied with reversed airflow direction (from inside the cabinet to outside).
 - To order, add "R" after series number. Example: KNP40RF
- Optional filters are stable up to 100°C and 100% rh, and guarantee a continuously high level of protection according to EU4, with a 94% separation efficiency according to DIN 24185 Standard. The dust capacity is particularly high (620 g/m²), which reduces maintenance.
 - To order optional IP54 rated filter add a "4" to the part number. Example: KNP40F4
 - To order optional IP55 rated filter add a "5" to the part number. Example: KNP40F5
- Other supply voltages, both AC and DC, are available on request.
- Depending on the request and quantity, parts can be supplied in different colors.
- Replacement standard filters (P/N: 531F).



HOW TO ORDER

Specify model number. Filter fans can be supplied with reverse airflow direction. To order, add "R" after series number. Example: KNP40RF.